
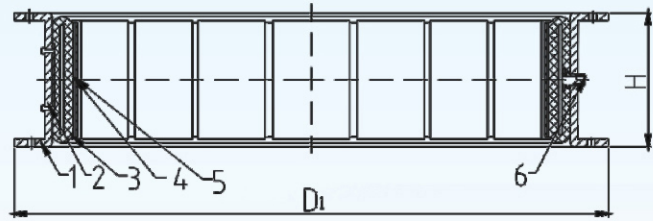


# 普通型气胎离合器

Common Pneumatic Clutch

- 1-钢圈
  - 2-连接板固定螺钉
  - 3-普通型离合器气囊
  - 4-钢片
  - 5-摩擦片
  - 6-气嘴固定圈
- 1-steel ring
  - 2-fixing screw on connection board
  - 3-air tube of common type clutch
  - 4-billet steel
  - 5-friction lining
  - 6-air cock fixed ring

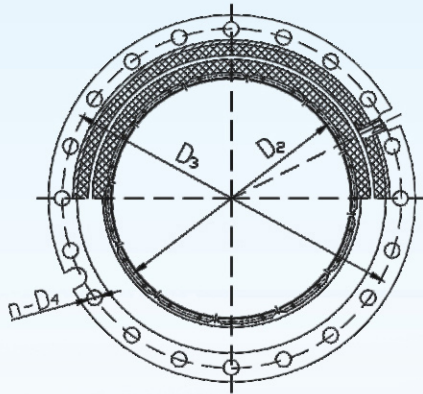

## 技术参数 Technical Parameter

型号 Model	转速r/min Rotate speed		扭矩N.m Torque		工作压力 Mpa Working pressure	气胎容积L Pneumatic volumetric	摩擦轮直径 D2 mm Friction wheel diameter	联接尺寸 mm Connection size					进气管螺纹 Inlet pipe thread
	极限 Limited	额定 Rated	极限 Limited	额定 Rated				轮缘直径 D1 mm Rim diameter	轮缘宽度 H mm Rim width	定位直径 D3 mm Location diameter	螺孔数量 及直径 n-d mm Screw hole quantity and diameter	螺栓孔 分布直径 D4 mm Bolt distribute diameter	
LT300/100	2332-2667	1348-1542	3080-4030	2025-2686	0.7-0.8	1.3	296	450	115	450H11	12-Φ13H12	430	M20 1.5
LT400/125	1980-1765	986-1142	7061-10030	6521-8430	0.6-1.0	2	400	600	168	---	---	576	M20 × 1.5
LT500/125	1642-1877	949-1085	10455-13670	6790-9114	0.7-0.8	5.5	497	720	154	720H11	12-Φ17H12	690	M20 × 1.5
LT600/125	1652-1547	781-894	14810-19360	9875-12908	0.7-0.9	5.5	597	820	154	820H11	16-Φ17H12	790	M20 × 1.5
LT700/200	1315-1504	760-869	33080-43270	22060-28850	0.7-0.9	14	695	1000	246	1000H11	12-Φ26H12	950	M33 × 1.5
CBC700/135	1198-1450	687-881	22350-32660	14900-21775	0.7-1.0	3.7	696	900	176	900H11	20-Φ17H12	870	M20 × 1.5
LT800/135	1099-1328	635-768	28850-42160	19230-28080	0.7-1.0	4	796	1015	176	1015H11	24-Φ17H12	975	M20 × 1.5