


单通道旋转密封阀

Single Passage Rotorseals

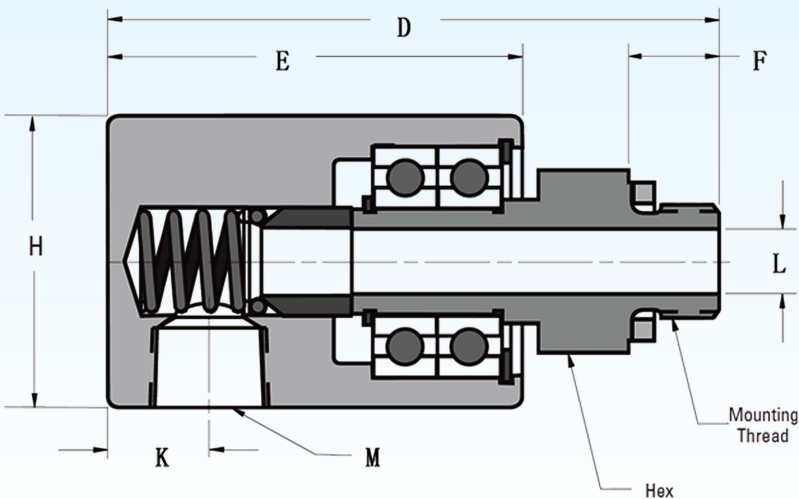

型号尺寸 Dimensions Data

型号 Model	管道面积 Passage Area	重量 Weight	六角尺寸 Hex Size	螺纹 Mounting Thread	D	E	F	H	K	L	M
AA2	0.019(0.12)	0.4(0.2)	0.625(15.9)	3/8-24	2.81(71)	2.00(51)	0.5(13)	1.38(35)	0.38(10)	0.16(4)	1/8-27
B3	0.111(0.72)	0.6(0.3)	0.875(22.2)	5/8-18	3.38(86)	2.25(57)	0.5(13)	1.63(41)	0.56(14)	0.36(9)	3/8-18
C2	0.307(1.98)	2.0(0.9)	1.375(34.9)	1-14	4.45(113)	3.00(76)	0.75(19)	2.38(60)	0.69(18)	0.63(16)	1/2-14
单位SI	IN ² (cm ²)	lb(kg)	Dimensions in inches(millimeters)								

技术参数 Technical Parameter

型号 Model	说明 Description	最高转速/分钟 Maximum rpm	最大压力 Maximum Pressure	
			psi	bar
AA2	标准 Standard Model	4000	150	10.3
	高压 High Pressure	1000	1000	69
B3	标准 Standard Model	4000	150	10.3
	高压 High Pressure	600	1000	69
C2	标准 Standard Model	3000	150	10.3
	高压 High Pressure	400	1000	69